#### HP Color LaserJet Enterprise X58045 series printers



Product Guide (X58045 series)

# Powerfully compact. Extraordinarily efficient.

Modern work environments have become more dynamic, requiring teams to be more adaptable in their methods of operation. Stay a step ahead with the powerfully innovative HP Color LaserJet Enterprise X58045 series MFPs and printers, designed to deliver advanced capabilities that help transform your workflows for enhanced productivity and document management. Scalable solutions evolve alongside your business, and the most secure printing technology in the world ensures that your workforce is prepared for what the future brings. Discover how this managed portfolio can power your business today.





More than a printer, in a compact footprint



Customizable and scalable solutions



Fast and seamless digitization



HP WOLF SECURITY

Always on guard with HP Wolf Security<sup>5</sup>

### Get to know the HP Color LaserJet Enterprise X58045 series

HP Color LaserJet Enterprise Flow MFP X58045z shown



#### Series at a glance







| Model   | HP Color Laser Jet Enterprise<br>MFP X58045dn                        | HP Color LaserJet Enterprise<br>Flow MFP X58045z                     | HP Color LaserJet Enterprise<br>Flow MFP X58045zs                    |
|---|--|--|--|
| Product number  | 7E357A   | 7H5W6A   | 7H5W7A   |
| Functions   | Print, copy, and scan<br>(fax and wireless optional)<br>(all models) | Print, copy, and scan<br>(fax and wireless optional)<br>(all models) | Print, copy, and scan<br>(fax and wireless optional)<br>(all models) |
| Print speed (A4 and letter, black and color) <sup>3</sup> | 43/45 ppm (A4/letter)  | 43/45 ppm (A4/letter)  | 43/45 ppm (A4/letter)  |
| Control panel   | 8-inch color touchscreen display                                     | 10.1-inch color touchscreen display                                  | 10.1-inch color touchscreen display                                  |
| Scan speed⁴   | 50/100 ipm (simplex/duplex)  | 60/120 ipm (simplex/duplex)  | 60/120 ipm (simplex/duplex)  |
| RMPV  | Up to 15,000 pages per month   | Up to 15,000 pages per month   | Up to 15,000 pages per month   |
| Input capacity  | 650/2,300 (std/max)  | 650/2,300 (std/max)  | 650/1,750 (std/max)  |
| Output capacity (standard)                                | 250-sheets   | 250-sheets   | 750-sheets   |
| Processor   | Tri-core 1.2 GHz   | Tri-core 1.2 GHz   | Tri-core 1.2 GHz   |
| Flow solutions  | No   | Yes  | Yes  |
| Workpath-enabled  | Yes  | Yes  | Yes  |
| Extensibility   | HP FutureSmart 5, OXPd   | HP FutureSmart 5, OXPd   | HP FutureSmart 5, OXPd   |

#### **Footnotes**

- 1. Solutions deployed through the Hardware Integration Pocket (HIP) may require additional purchase.
- 2. An administrator must enable the Easy-access USB port before use.
- Measured using ISO/IEC 24734, excludes first set of test documents. For more information, see <a href="hp.com/go/printer">hp.com/go/printer</a> claims. The exact speed varies depending on the system configuration, software application, driver, and document complexity.
- 4. Scan speeds measured from ADF. Actual processing speeds may vary depending on scan resolution, network conditions, computer performance, and application software.
- 5. HP Security is now HP Wolf Security. Security features vary by platform, please see the product data sheet for details.

| Processor speed                             | 1.2 GHz  |   |  |  |  |  |  |
|---|--|---|--|--|--|--|--|
| Orderable supplies                          | HP LaserJet 110V Fuser Kit 5   | HP LaserJet 110V Fuser Kit 527G0A; HP LaserJet 220V Fuser Kit 527G1A; HP LaserJet 110V Enhanced Fuser Kit 527G6A; HP LaserJet 220V Enhanced Fuser Kit 527G7A; HP LaserJet Image Transfer Belt 527G8A; HP LaserJet Image Transfer Belt Kit 527G9A; |  |  |  |  |  |
|   |  | Roller Kit 527H3A; HP LaserJet ADF Maintenance Kit 6H121A   |  |  |  |  |  |
| Printer smart software features             |  | ified, Open Extensibility Platform, FutureSmart firr<br>dware Integration Pocket, Intuitive 8-in touchscree<br>, print preview  |  |  |  |  |  |
| Power consumption description               | 655 watts (Printing/copying)   | ,50.1 watts (Ready), 0.9 watts (Sleep), 0.09 watts (N   | Manual off)  |  |  |  |  |
| Power supply                                | Туре   | Built-in 110V or 220V Power Supply (not dual voltage, power supply varies by part number with option code identifier)   | Required   | Input voltage: 100 to 127 VAC, 60 Hz, Input voltage: 200 to 240 VAC, 50 Hz (Not dual voltage, product varies by part number with option code identifier)   |  |  |  |
| What is in the box                          |  | tion Printer; HP Black Original LaserJet Toner Cart<br>h) (toner cartridges installed); Documentation (Ha   |  |  |  |  |  |
| Replacement cartridges <sup>2</sup>         | HP 213A Yellow Original Lase<br>213X High Yield Black Origin<br>W2132X HP 213X High Yield<br>(~6,000 pages); W2130Y HP<br>LaserJet Toner Cartridge (~1   | inal Laser Jet Toner Cartridge (~3,500 pages); W21<br>er Jet Toner Cartridge (~3,000 pages); W2133A HP 2<br>al Laser Jet Toner Cartridge (~9,000 pages); W2131<br>Yellow Original Laser Jet Toner Cartridge (~6,000 p<br>213Y Extra High Yield Black Original Laser Jet Tone<br>12,000 pages); W2132Y HP 213Y Extra High Yield Ye<br>Laser Jet Toner Cartridge (~12,000 pages)  | 213A Magenta Original LaserJo<br>IX HP 213X High Yield Cyan Ori<br>ages); W2133X HP 213X High Y<br>r Cartridge, (~18,000 pages); W | et Toner Cartridge (~3,000 pages); W2130X HP<br>ginal LaserJet Toner Cartridge (~6,000 pages);<br>rield Magenta Original LaserJet Toner Cartridge<br>/2131Y HP 213Y Extra High Yield Cyan Original |  |  |  |
| Supplies feature                            | TerraJet Cartridge   |   |  |  |  |  |  |
| Electromagnetic emission standard           |  | il) - Class A; CISPR 32:2015 (International) - Class A<br>: 61000-3-2:2019; EN 61000-3-3:2013 + A1:2019 + A2<br>ividual countries.  |  |  |  |  |  |
| Safety approvals and requirements           | Product); EN 62479:2010/IEC<br>CoC (US/Canada); UL62368-   | IEC 60950-1:2005 + A1:2009 + A2:2013 (International); IEC 62368-1:2014; EN 62368-1:2014 (EU); EN 60825-1:2014 + A11:2021/IEC 60825-1:2014 (Class 1 Laser Product); EN 62479:2010/IEC 62479:2010; Low Voltage Directive 2014/35/EU with CE Mark (Europe); GS certificate (Germany, Europe); UL/cUL Listed and UC CoC (US/Canada); UL 62368-1 2 <sup>∞</sup> Ed. 2014-12-01; CSA C22.2 No. 62368-1-14, 2 <sup>∞</sup> Ed.; IEC 62471:2006; EN 62471:2008; Compliance with Laser safety standards 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 56, dated May 8, 2019; Other safety approvals as required by individual countries  |  |  |  |  |  |
| Ecolabels                                   | CECP; IT ECO Declaration; B  | lue Angel; SEPA; KOECO  |  |  |  |  |  |
| Blue Angel compliance                       | Yes, Blue Angel DE-UZ 219-c  | only ensured when using Original HP supplies  |  |  |  |  |  |
| Sustainable impact specifications           | 15% post-consumer recycle  | d plastic   |  |  |  |  |  |
| Network capabilities                        |  | et embedded print server (standard) supports: 10E<br>dard); 802.11a/b/g/n wireless networking (optional)  |  | r; 802.3az (EEE) support on Fast Ethernet and  |  |  |  |
| Supported network protocols                 | Via built-in networking solution: TCP/IP, IPv6; Print: TCP-IP port 9100 Direct Mode, LPD (raw queue support only), Web Services printing, IPP 2.0, Apple AirPrint™, FTP Print, Google Cloud Print; DISCOVERY: SLP, Bonjour, Web Services Discovery; IP CONFIG: IPv4 (BootP, DHCP, AutoIP, Manual, TFTP Config, ARP-Ping), IPv6 (Stateless Link-Local and via Router, Statefull via DHCPv6); Management: SNMPv2/v3, HTTP/HTTPs, Telnet, TFTP Config, FTP FW Download, Syslog; Security: SNMPv3, SSL Cert Management, Firewall, ACL, 8021x |   |  |  |  |  |  |
| Mobile printing capability                  | Apple AirPrint™; Mopria™ cer   | tified; NFC touch-to-print (optional)   |  |  |  |  |  |
| Copier reduce/enlarge                       | 25 to 400%   |   |  |  |  |  |  |
| Max. number of copies                       | Up to 9,999 copies   |   |  |  |  |  |  |
| Copyresolutions                             | Black text   | Up to 600 x 600 dpi   | Color text and graphics  | Up to 600 x 600 dpi  |  |  |  |
| Copy speed (Black)                          | Normal, A4   | Up to 43 cpm  | Normal, Letter   | Up to 45 cpm   |  |  |  |
| Copy speed (Color)                          | Normal, A4   | Up to 43 cpm  | Normal, Letter   | Up to 45 cpm   |  |  |  |
| Digital sending standard features           | Scan to Email; scan to Network Folder; Scan to USB Drive; Scan to SharePoint; Scan to SFTP; Scan to SFTP; Scan to Internet Fax; local address book; SMTP over SSL; automatically detect color/monochrome; high compression PDF; image adjustments (darkness, contrast, background cleanup, sharpness); optimize text/picture (text, mixed, printed picture, photograph); content orientation; scan mode (book, 2-sided ID); erase edges; auto page crop; job build; image preview; blank page suppression; automatically straighten      |   |  |  |  |  |  |
| Package dimensions                          | Metric   | 598 x 758 x 652 mm  | Imperial   | 23.54 x 29.84 x 25.67 in   |  |  |  |
| Max. dimensions                             | Metric   | 885 x 810 x 828 mm  | Imperial   | 34.8 x 31.9 x 32.6 in  |  |  |  |
| Product dimensions                          | Metric   | 500 x 460 x 583 mm  | Imperial   | 19.7 x 18.1 x 23.0 in  |  |  |  |
| Display description                         | 8.0-in Color Graphic Display   | (CGD) with touchscreen; rotating (adjustable angle  | e)   |  |  |  |  |
| Acoustic power emissions (active, printing) | 6.3 B(A)   |   |  |  |  |  |  |

| Acoustic pressure emissions bystander (ready)  | 20 dB(A)  |  |                               |  |  |  |
|--|---|--|-------------------------------|--|--|--|
| Operating humidity range                       | 10 to 80% RH  |  |                               |  |  |  |
|  | Celsius   |  |                               |  |  |  |
| Operating temperature range                    | Recommended celsius   | 10 to 32.5°C<br>15 to 27°C                             | Fahrenheit Recommended        | 50 to 91°F<br>59 to 80.6°F                 |  |  |
|  | Recommended celsius   | 13 10 27 0   | fahrenheit                    | 55 15 50.5 1                               |  |  |
| Storage Temperature Range                      | Celsius   | -20 to 40°C  | Fahrenheit                    | -4 to 104°F                                |  |  |
| Operating humidity range (recommended)         | 30 to 70% RH  |  |                               |  |  |  |
| Fax  | Optional  |  |                               |  |  |  |
| Fax speed (Letter)                             | 3 sec per page  |  |                               |  |  |  |
| Fax speed                                      | Up to 33.6 kbps (with option  | al analog fax accessory)                               |                               |  |  |  |
| Memory   | Standard  | 6 GB   | Maximum                       | 6 GB                                       |  |  |
| Print resolution technologies                  | HP ImageREt 3600, Enhance   | ed (600 x 600 dpi), Fine Lines (1200 x 1200 dpi), Quid | kview (300 x 300 dpi), PANTOI | NE® calibrated                             |  |  |
| Print speed                                    | Black (normal, A4)  | Up to 43 ppm   | Black (normal, Letter)        | Up to 45 ppm                               |  |  |
|  | Color (normal, A4)  | Up to 43 ppm   | Color (normal, Letter)        | Up to 45 ppm                               |  |  |
|  | Up to 45 ppm (black) and 45   | ppm (color)  |                               |  |  |  |
| First page out                                 | Black (A4, ready)   | As fast as 7.2 sec                                     | Black (Letter, ready)         | As fast as 6.7 sec                         |  |  |
|  | Color (A4, ready)   | As fast as 7.9 sec                                     | Color (Letter, ready)         | As fast as 7.4 sec                         |  |  |
| Monthly duty cycle                             | A4  | Up to 120,000 pages                                    | Letter                        | Up to 120,000 pages                        |  |  |
| Recommended monthly page volume                | 2,000 to 15,000   |  |                               |  |  |  |
| Fonts and typefaces                            | 105 internal TrueType fonts scalable in HP PCL, 92 internal scalable fonts in HP postscript level 3 emulation (Euro symbol built-in); 1 internal Unicode fonts (Andale Mono World Type); 2 internal Windows Vista 8 fonts (Calibri, Cambria); Additional font solutions available via third-party flash memory cards; HP LaserJet Fonts and IPDS Emulation available at <a href="http://www.hp.com/go/laserjetfonts">http://www.hp.com/go/laserjetfonts</a> |  |                               |  |  |  |
| Hard disk                                      | Standard, 32 GB eMMC; Opt   | ional, minimum 500 GB HDD                              |                               |  |  |  |
| Print languages, standard                      | XPS, HP PCL 6; HP PCL 5c; H   | P postscript level 3 emulation, native PDF printing    | (v 1.7)                       |  |  |  |
| Printer management                             | HP Web Jetadmin, HP Secur<br>Device Services (SDS)  | ity Manager, HP Secure Insights, Embedded Web S        | Server, HP Command Center, I  | HP Secure Fleet Manager Advanced, HP Smart |  |  |
| Top key features                               | Automatic Document Feede  | er; Optional high-capacity trays; Touchscreen; Terro   | aJet Cartridge                |  |  |  |
| Target number of users and print volume        | For teams up to 15 users; Pri   | nts up to 15,000 pages/month                           |                               |  |  |  |
| AIO functions                                  | Print, copy, scan, fax (option  | (Ic  |                               |  |  |  |
| Duplex print options                           | Automatic   |  |                               |  |  |  |
| Print technology                               | Laser   |  |                               |  |  |  |
| Paper trays, standard                          | 2   |  |                               |  |  |  |
| Capacity, std.                                 | Input   | Up to 650 sheets                                       | Output                        | Up to 250 sheets                           |  |  |
| Media type and capacity tray 1                 | Paper: 100 sheets of 75 g/m   | <sup>2</sup> media; Envelopes: 10                      |                               |  |  |  |
| Paper handling standard/input                  | 550-sheet input tray, 100-sh  | eet multi-purpose tray                                 |                               |  |  |  |
| Input capacity, Max. envelopes                 | Up to 10 envelopes  |  |                               |  |  |  |
| Product short name                             | X58045  |  |                               |  |  |  |
| Typical Electricity Consumption (TEC) number   | 0.552 kWh/week (ENERGY S  | TAR 3.0); 0.551 kWh/week (Blue Angel)                  |                               |  |  |  |
| Number of simultaneous users (local + network) | 5-15 users  |  |                               |  |  |  |
| Scan resolution                                | Hardware  | Up to 600 x 600 dpi                                    | Optical                       | Up to 600 dpi                              |  |  |
|  | Enhanced  | Up to 600 dpi  |                               |  |  |  |
| Scan speed (normal, A4)                        | Up to 47 ppm/94 ipm (b&w), up to 47 ppm/94 ipm (color)  |  |                               |  |  |  |
| Automatic Document Feeder capacity             | Standard, 100 sheets  |  |                               |  |  |  |

| Color scanning                         | Yes   |   |  |   |  |  |  |
|--|---|---|--|---|--|--|--|
| Grayscale levels                       | 256   |   |  |   |  |  |  |
| Scan input modes                       | Front panel applications: Co<br>Workpath applications   | Front panel applications: Copy; Fax; Scan to Email; Scan to Network Folder; Scan to USB; Scan to Job Storage; Open Extensibility Platform (OXP), HP Workpath applications   |  |   |  |  |  |
| Scan size maximum                      | ADF, metric   | 216 x 864 mm  | ADF, imperial  | 8.5 x 34.0 in   |  |  |  |
|  | Flatbed, imperial   | 216 x 356 mm  | Flatbed, imperial  | 8.5 x 14 in   |  |  |  |
|  | ADF, metric   | 68 x 127 mm   | ADF, imperial  | 2.7 x 5 in  |  |  |  |
| Bit depth                              | 24-bit  |   |  |   |  |  |  |
| Security management                    | badge readers); Network: IPs<br>TLS); SNMPv3; HTTPS; Certii<br>from Microsoft); Secure Eras<br>security solutions; Intrusion<br>Integrity Checking with self-   | eros authentication; LDAP authentication; 1000-use<br>sec/firewall with certificate; Pre-shared key; Suppo<br>ficates; Access control list; Data: Storage encrypti<br>se; SSL/TLS (HTTPS); Encrypted credentials; Devic<br>Detection with Red Balloon Security technology (c<br>healing capability); Whitelisting (loads only known a<br>rity management: Compatible with Device Security | orts WJA-10 IPsec configuratio<br>on; Encrypted PDF & Email (us<br>e: Security lock slot; USB port<br>constant in-device monitoring<br>good code DLLs, EXEs, etc.); Er | n Plug-in; 802.1X authentication (EAP-PEAP; EAP-<br>es FIPS 140 validated cryptographic libraries<br>disablement; Hardware Integration Pocket for<br>for attacks); HP Sure Start Secure Boot (BIOS<br>mbedded Trusted Platform Module (TPM); HP   |  |  |  |
| Scan speed (normal, A4)                | Up to 47 ppm/94 ipm (b&w), u  | up to 47 ppm/94 ipm (color)   |  |   |  |  |  |
| Automatic Document Feeder capacity     | Standard, 100 sheets  |   |  |   |  |  |  |
| Color scanning                         | Yes   |   |  |   |  |  |  |
| Grayscale levels                       | 256   |   |  |   |  |  |  |
| Scan input modes                       | Front panel applications: Copy; Fax; Scan to Email; Scan to Network Folder; Scan to USB; Scan to Job Storage; Open Extensibility Platform (OXP), HP Workpath applications   |   |  |   |  |  |  |
| Scan size maximum                      | ADF, metric   | 216 x 864 mm  | ADF, imperial  | 8.5 x 34.0 in   |  |  |  |
|  | Flatbed, imperial   | 216 x 356 mm  | Flatbed, imperial  | 8.5 x 14 in   |  |  |  |
|  | ADF, metric   | 68 x 127 mm   | ADF, imperial  | 2.7 x 5 in  |  |  |  |
| Bit depth                              | 24-bit  |   |  |   |  |  |  |
| TWAIN Version                          | Version 2.4   |   |  |   |  |  |  |
| Security management                    | Identity management: Kerberos authentication; LDAP authentication; 1000-user pin codes; optional HP and 3 <sup>rd</sup> party advanced authentication solutions (e.g. badge readers); Network: IPsec/firewall with certificate; Pre-shared key; Supports WJA-10 IPsec configuration Plug-in; 802.1X authentication (EAP-PEAP; EAP-TLS); SNMPv3; HTTPS; Certificates; Access control list; Data: Storage encryption; Encrypted PDF & Email (uses FIPS 140 validated cryptographic libraries from Microsoft); Secure Erase; SSL/TLS (HTTPS); Encrypted credentials; Device: Security lock slot; USB port disablement; Hardware Integration Pocket for security solutions; Intrusion Detection with Red Balloon Security technology (constant in-device monitoring for attacks); HP Sure Start Secure Boot (BIOS Integrity Checking with self-healing capability); Whitelisting (loads only known good code DLLs, EXEs, etc.); Embedded Trusted Platform Module (TPM); HP Connection Inspector; Security management: Compatible with Device Security Syslog Messages processed and accessible in Arcsight and Splunk SIEMs |   |  |   |  |  |  |
| TWAIN Version                          | Version 2.4   |   |  |   |  |  |  |
| Software included                      | No software solutions are in  | cluded in the box, only on http://hp.com.http://123.h   | p.com  |   |  |  |  |
| Media types                            |   | ate, light bond, bond, recycled, mid-weight, heavy, n<br>ency, labels, letterhead, envelope, pre-printed, pre-p   |  |   |  |  |  |
| Standard media sizes supported         | Metric  | Tray 1: A4, A5, A6, RA4, B5, B6, 16k, 10 x 15 cm, Oficio, postcards (JIS single and double) envelopes (DL, C5, B5, C6); Tray 2, optional 1x550-sheet feeders: A4, A5, A6, RA4, B5, B6, 10 x 15 cm, Oficio, 16k, Dpostcard (JIS)   | Imperial   | Tray 1: Letter, Legal, Executive, Statement, Oficio, $3 \times 5$ in, $4 \times 6$ in, $5 \times 7$ in, $5 \times 8$ in, envelopes (No. 9, No. 10, Monarch); Tray 2, optional $1 \times 550$ -sheet feeders: Letter, Legal, Executive, Statement, Oficio, $4 \times 6$ in, $5 \times 7$ in, $5 \times 8$ in |  |  |  |
| Media sizes custom                     | Metric  | Tray 1: 64 x 127 to 216 x 1200 mm; Tray 2, optional 1x550-sheet feeders: 101 x 148 to 216 x 356 mm  | Imperial   | Tray 1: 2.52 x 5 to 8.5 x 47.24 in; Tray 2, optional 1x550-sheet feeders: 4 x 5.83 to 8.5 x 14 in   |  |  |  |
| Media size, tray 1 (metric)            | A4, A5, A6, RA4, B5, B6, 10 x 1   | 5 cm, Oficio 216 x 340, 16k, Postcard (JIS), DPostca  | rd (JIS), Envelopes (DL, C5, B5,   | C6); custom 64 x 127 to 216 x 1200 mm   |  |  |  |
| Media weights supported, by paper path | Metric  | Tray 1: 60 to 220 g/m² (plain), 120 to 220 g/m² (glossy); Tray 2: 60 to 220 g/m² (plain), 120 to 220 g/m² (glossy); Optional 550-sheet input trays: 60 to 220 g/m² (plain), 120 to 220 g/m² (glossy)  | Imperial   | Tray 1: 16 to 58 lb (plain), 32 to 58 lb (glossy);<br>Tray 2: 16 to<br>58 lb (plain), 32 to 58 lb (glossy); Optional<br>550-sheet input trays: 16 to 58 lb (plain), 32 to<br>58 lb (glossy)   |  |  |  |

| Media weights supported, tray 1 (metric) | 60 to 220 g/m² (plain), 120 to 220 g/m² (glossy)   |  |                                    |   |  |
|--|--|--|------------------------------------|---|--|
| Media size, ADF                          | Letter; Legal; Oficio; Executiv  | ve; Statement; 16K; A4; RA4; A5; A6; B5; B6 (JIS); Pos   | stcard (JIS); DPostcard (JIS); 4 x | x 6 in; 5 x 7 in; 5 x 8 in  |  |
| Media weights supported, ADF             | Metric   | 45 to 199 g/m²   | Imperial                           | 12 to 53 lb   |  |
| Key media sizes supported                | Metric   | A4   | Imperial                           | Letter; Legal   |  |
| Control Panel                            | 8.0-in touchscreen with color graphics   |  |                                    |   |  |
| System requirements                      | Minimum  | 2 GB available hard disk space; Internet connection; or USB port; Internet browser. For additional OS hardware requirements, see microsoft.com | Macintosh, minimum                 | 2 GB available hard drive space; Internet connection; or USB port; Internet browser. For additional OS hardware requirements, see apple.com |  |
| Manufacturer warranty                    | One-year Next Business Day Onsite Warranty; Warranty and support options vary by product, country, and local legal requirements. Go to <a href="http://www.hp.com/support">http://www.hp.com/support</a> to learn about HP award-winning service and support options in your region. |  |                                    |   |  |
| Weight                                   | Metric   | 38.9 kg  | Imperial                           | 85.6 lb   |  |
| Package weight                           | Metric   | 41.4 kg  | Imperial                           | 89 lb   |  |

| Processor speed                               | 1.2 GHz  |   |   |  |  |  |
|---|--|---|---|--|--|--|
| Orderable supplies                            | Kit 527G7A; HP LaserJet Ima  | HP LaserJet 110V Fuser Kit 527G0A; HP LaserJet 220V Fuser Kit 527G1A; HP LaserJet 110V Enhanced Fuser Kit 527G6A; HP LaserJet 220V Enhanced Fuser Kit 527G7A; HP LaserJet Image Transfer Belt Kit 527G9A; HP LaserJet Tray 2 Roller Kit 527H2A; HP LaserJet MP Tray Roller Kit 527H3A; HP LaserJet ADF Maintenance Kit 6H121A; HP Staple Cartridge Pack (3,000 staples) Q7432A            |   |  |  |  |
| Printer smart software features               |  | tified, Open Extensibility Platform, FutureSmart fir<br>rdware Integration Pocket, Intuitive 10.1-in touchsc<br>s, print preview  |   |  |  |  |
| Power consumption description                 | 655 watts (Printing/copying  | ), 50.1 watts (Ready), 0.9 watts (Sleep), 0.09 watts (  | Manual off)   |  |  |  |
| Power supply type                             | Built in 110V or 200V power  | supply (not dual voltage, power supply varies by po   | art number with option code id  | lentifier)   |  |  |
| Power supply required                         | Input voltage: 100V to 127V r  | nominal (+/-10%), 50 - 60 Hz nominal (+/- 3 Hz), 12A;   | Input voltage: 220V to 240V no  | ominal, (+/-10%) 50 - 60 Hz nominal (+/- 3 Hz), 6A   |  |  |
| What is in the box                            |  | ction Printer; HP Black Original LaserJet Toner Car<br>ch) (toner cartridges installed); Documentation (Ho  |   |  |  |  |
| Replacement cartridges <sup>2</sup>           | HP 213A Yellow Original Las<br>HP 213X High Yield Black Or<br>pages); W2132X HP 213X Hig<br>Cartridge (~6,000 pages); W<br>Original LaserJet Toner Car   | inal Laser Jet Toner Cartridge (~3,500 pages); W2'<br>er Jet Toner Cartridge (~3,000 pages); W2133A HP<br>iginal Laser Jet Toner Cartridge (~9,000 pages); W<br>ph Yield Yellow Original Laser Jet Toner Cartridge (<br>1/2130Y HP 213Y Extra High Yield Black Original Las<br>tridge (~12,000 pages); W2132Y HP 213Y Extra High<br>ta Original Laser Jet Toner Cartridge (~12,000 pages) | 213A Magenta Original Laser,<br>2131X HP 213X High Yield Cyar<br>~6,000 pages); W2133X HP 213<br>erJet Toner Cartridge (~18,00<br>n Yield Yellow Original LaserJe | Jet Toner Cartridge (~3,000 pages); W2130X<br>O Original LaserJet Toner Cartridge (~6,000<br>3X High Yleid Magenta Original LaserJet Toner<br>0 pages); W2131Y HP 213Y Extra High Yield Cyan |  |  |
| Supplies feature                              | TerraJet Cartridge   |   |   |  |  |  |
| Electromagnetic emission standard             |  | al) Class A, CISPR 32:2015 (International) Class A /<br>EC 61000-3-2:2019, EN 61000-3-3:2013 + A1:2019 + A<br>dividual countries.   |   |  |  |  |
| Safety approvals and requirements             | IEC 60950-1:2005 + A1:2009 + A2:2013 (International); IEC 62368-1:2014; EN 62368-1:2014 (EU); EN 60825-1:2014 + A1:2021/IEC 60825-1:2014 (Class 1 Laser Product); EN 62479:2010/IEC 62479:2010; Low Voltage Directive 2014/35/EU with CE Mark (Europe); GS certificate (Germany, Europe); UL/cUL Listed and UC CoC (US/Canada); UL62368-1 2nd Ed. 2014-12-01, CSA C22.2 No. 62368-1-14, 2nd Ed.; Compliance with laser safety standards 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 56, dated May 8, 2019; Other safety approvals as required by individual countries.   |   |   |  |  |  |
| Ecolabels                                     | CECP; IT ECO Declaration; E  | Blue Angel; SEPA; KOECO   |   |  |  |  |
| Blue Angel compliance                         | Yes, Blue Angel DE-UZ 219-   | only ensured when using Original HP supplies  |   |  |  |  |
| Sustainable impact specifications             | 15% post-consumer recycle  | ed plastic  |   |  |  |  |
| Network capabilities                          |  | Yes, via HP Jetdirect Ethernet embedded print server (standard) supports: 10Base-T, 100Base-Tx, 1000Base-T; 802.3az (EEE) support on Fast Ethernet and Gigabit Ethernet; IPsec (standard); 802.11a/b/g/n wireless networking (optional)   |   |  |  |  |
| Supported network protocols                   | AirPrint™, FTP Print, Google<br>ARP-Ping), IPv6 (Stateless L   | ion: TCP/IP, IPv4, IPv6; Print: TCP-IP port 9100 Direc<br>Cloud Print; DISCOVERY: SLP, Bonjour, Web Servic<br>ink-Local and via Router, Statefull via DHCPv6); Mc<br>SSL Cert Management, Firewall, ACL, 802.1x   | es Discovery; IP CONFIG: IPv4   | (BootP, DHCP, AutoIP, Manual, TFTP Config,   |  |  |
| Mobile printing capability                    | Apple AirPrint™; Mopria™ ce  | rtified; NFC touch-to-print (optional)  |   |  |  |  |
| Copier reduce/enlarge                         | 25 to 400%   |   |   |  |  |  |
| Max. number of copies                         | Up to 9,999 copies   |   |   |  |  |  |
| Copy resolution                               | Black text   | Up to 600 x 600 dpi   | Color text and graphics   | Up to 600 x 600 dpi  |  |  |
| Copy speed                                    | Black (normal, A4)   | Up to 43 cpm  | Black (normal, Letter)  | Up to 45 cpm   |  |  |
|   | Color (normal, A4)   | Up to 43 cpm  | Color (normal, Letter)  | Up to 45 cpm   |  |  |
| Digital sending standard features             | Scan to Email; scan to Network Folder; Scan to USB Drive; Scan to SharePoint; Scan to FTP; Scan to LAN Fax; Scan to Internet Fax; local address book; SMTP over SSL; automatically detect color/monochrome; high compression PDF; image adjustments (darkness, contrast, background clean-up, sharpness); optimize text/picture (text, mixed, printed picture, photograph); content orientation; scan mode (book, 2-sided ID); erase edges; auto page crop; job build; image preview; blank page suppression; automatically straighten; embedded OCR; optimize text/picture (auto); Scan to multi-destination; automatic tone; auto orientation; multi-feed detection; document editing; auto paper color removal; job separation (blank page, barcode); watermark; stamps |   |   |  |  |  |
| Package dimensions                            | Metric   | 598 x 758 x 652 mm  | Imperial  | 23.54 x 29.84 x 25.67 in   |  |  |
| Max. dimensions                               | Metric   | 885 x 810 x 828 mm  | Imperial  | 34.8 x 31.9 x 32.6 in  |  |  |
| Product dimensions                            | Metric   | 547 x 460 x 583 mm  | Imperial  | 21.5 x 18.1 x 23.0 in  |  |  |
| Display description                           | 10.1-in Color Graphic Display  | y (CGD) with touchscreen; rotating (adjustable ang  | ile)  |  |  |  |
| Acoustic power emissions (active, printing)   | 6.3 B(A)   |   |   |  |  |  |
| Acoustic pressure emissions bystander (ready) | 22 dB(A)   |   |   |  |  |  |
| Operating humidity range                      | 10 to 80% RH   |   |   |  |  |  |

|  |   | T  | 1                              |                     |  |
|--|---|--|--------------------------------|---------------------|--|
| Operating temperature range                    | Celsius   | 10 to 32.5℃  | Fahrenheit                     | 50 to 91°F          |  |
|  | Recommended celsius   | 15 to 27°C   | Recommended fahrenheit         | 59 to 80.6°F        |  |
| Storage Temperature Range                      | Celsius   | -20 to 40°C  | Fahrenheit                     | -4 to 104°F         |  |
| Operating humidity range (recommended)         | 30 to 70% RH  |  |                                |                     |  |
| Fax  | Yes   |  |                                |                     |  |
| Fax speed (Letter)                             | 3 sec per page  |  |                                |                     |  |
| Fax speed                                      | Up to 33.6 kbps   |  |                                |                     |  |
| Memory   | Standard  | 6 GB   | Maximum                        | 6 GB                |  |
| Print resolution technologies                  | HP ImageREt 3600, Enhance   | ed (600 x 600 dpi), Fine Lines (1200 x 1200 dpi), Qui  | ickview (300 x 300 dpi), PANTO | NE® calibrated      |  |
| Print speed                                    | Black (normal, A4)  | Up to 43 ppm   | Black (normal, Letter)         | Up to 45 ppm        |  |
|  | Color (normal, A4)  | Up to 43 ppm   | Color (normal, Letter)         | Up to 45 ppm        |  |
|  | Up to 45 ppm (black) and 45   | ppm (color)  |                                |                     |  |
| First page out (Black)                         | (A4, ready)   | As fast as 6.8 sec                                     | (letter, ready)                | As fast as 6.7 sec  |  |
| First page out (Color)                         | (A4, ready)   | As fast as 7.4 sec                                     | (letter, ready)                | As fast as 7.3 sec  |  |
| Monthly duty cycle                             | A4  | Up to 120,000 pages                                    | Letter                         | Up to 120,000 pages |  |
| Recommended monthly page volume                | 2,000 to 15,000   |  |                                |                     |  |
| Fonts and typefaces                            | 105 internal TrueType fonts scalable in HP PCL, 92 internal scalable fonts in HP postscript level 3 emulation (Euro symbol built-in); 1 internal Unicode fonts (Andale Mono World Type); 2 internal Windows Vista 8 fonts (Calibri, Cambria); Additional font solutions available via third-party flash memory cards; HP LaserJet Fonts and IPDS Emulation available at <a href="http://www.hp.com/go/laserjetfonts">http://www.hp.com/go/laserjetfonts</a> |  |                                |                     |  |
| Hard disk                                      | Standard, minimum 500 GB  | HDD  |                                |                     |  |
| Print languages, standard                      | XPS, HP PCL 6; HP PCL 5c; HP postscript level 3 emulation, native PDF printing (v 1.7)  |  |                                |                     |  |
| Printer management                             | HP Web JetAdmin; HP Security Manager, HP Secure Insights, Embedded Web Server, HP Command Center, HP Secure Fleet Manager Advanced. HP Smart Device Services (SDS)  |  |                                |                     |  |
| Top Key Features                               | Automatic document feeder; Optional high-capacity trays; Touchscreen; TerraJet Cartridge  |  |                                |                     |  |
| Target number of users and print volume        | For teams up to 15 users; Pr  | rints up to 15,000 pages/month                         |                                |                     |  |
| AIO functions                                  | Print, copy, scan, fax  |  |                                |                     |  |
| Duplex print options                           | Automatic   |  |                                |                     |  |
| Print technology                               | Laser   |  |                                |                     |  |
| Paper trays, standard                          | 2   |  |                                |                     |  |
| Capacity, std.                                 | Input   | Up to 650 sheets                                       | Output                         | Up to 250 sheets    |  |
| Media type and capacity tray 1                 | Paper: 100 sheets of 75 g/m   | ² media; Envelopes: 10                                 |                                |                     |  |
| Paper handling standard                        | Input   | 550-sheet input tray, 100-sheet multi-<br>purpose tray | Output                         | Convenience stapler |  |
| Input capacity, max. envelopes                 | Up to 10 envelopes  |  |                                |                     |  |
| Product short name                             | X58045  |  |                                |                     |  |
| Typical Electricity Consumption (TEC) number   | 0.552 kWh/week (ENERGY STAR 3.0); 0.551 kWh/week (Blue Angel)   |  |                                |                     |  |
| Number of simultaneous users (local + network) | 5-15 users  |  |                                |                     |  |
| Scan resolution                                | Hardware Up to 600 x 600 dpi Optical Up to 600 dpi  |  | Up to 600 dpi                  |                     |  |
|  | Enhanced  | Up to 600 dpi  |                                |                     |  |
| Scan speed (normal, A4)                        | Up to 56 ppm/112 ipm (b&w), up to 56 ppm/112 ipm (color)  |  |                                |                     |  |
| Automatic Document Feeder capacity             | Standard, 100 sheets  |  |                                |                     |  |
|  |   |  |                                |                     |  |

| Color scanning                           | Yes  |   |                                  |  |  |  |  |
|--|--|---|----------------------------------|--|--|--|--|
| Grayscale levels                         | 256  | 256   |                                  |  |  |  |  |
| Scan input modes                         | Front panel applications: Co   | Front panel applications: Copy; E-mail; Fax; Save to Network Folder; Save to USB; Save to Device Memory; Open Extensibility Platform (OXP) applications   |                                  |  |  |  |  |
| Scan size maximum                        | ADF, metric  | 216 x 864 mm  | ADF, imperial                    | 8.5 x 34.0 in  |  |  |  |
|  | Flatbed, metric  | 216 x 356 mm  | Flatbed, imperial                | 8.5 x 14.0 in  |  |  |  |
| Scan size minimum                        | ADF, metric  | 68 x 127 mm   | ADF, imperial                    | 2.7 x 5.0 in   |  |  |  |
| Bit depth                                | 24-bit   | 1   |                                  |  |  |  |  |
| TWAIN Version                            | Version 2.4  |   |                                  |  |  |  |  |
| Security management                      | (e.g. budge readers); Networ<br>EAP-TLS); SNMPv3; HTTPS; (<br>libraries from Microsoft); Se<br>Pocket for security solutions<br>Boot (BIOS Integrity Checkin | Identity management: Kerberos authentication; LDAP authentication; 1,000-user pin codes; Optional HP and 3 <sup>rd</sup> party advanced authentication solutions (e.g. badge readers); Network: IPsec/firewall with certificate; Pre-shared key; Supports WJA-10 IPsec configuration Plug-in; 802.1X authentication (EAP-PEAP; EAP-TLS); SNMPv3; HTTPS; Certificates; Access control list; Data: Storage encryption; Encrypted PDF & Email (uses FIPS 140 validated cryptographic libraries from Microsoft); Secure Erase; SSL/TLS (HTTPS); Encrypted credentials; Device: Security lock slot; USB port disablement; Hardware Integration Pocket for security solutions; Intrusion Detection with Red Balloon Security technology (constant in-device monitoring for attacks); HP Sure Start Secure Boot (BIOS Integrity Checking with self-healing capability); Whitelisting (loads only known good code DLLs, EXEs, etc.); Embedded Trusted Platform Module (TPM); HP Connection Inspector; Security management: Compatible with Device Security Syslog Messages processed and accessible in Arcsight and |                                  |  |  |  |  |
| Mac compatible                           | Yes  |   |                                  |  |  |  |  |
| Software included                        | No software solutions are in   | ncluded iin the box, only on http://hp.com http://123   | .hp.com;                         |  |  |  |  |
| Media types                              |  | ate, light bond, bond, recycled, mid-weight, heavy, i<br>ency, labels, letterhead, envelope, pre-printed, pre   |                                  |  |  |  |  |
| Standard media sizes supported           | Metric   | Tray 1: A4, A5, A6, RA4, B5, B6, 16k, 10 x 15 cm, Oficio, postcards (JIS single and double) envelopes (DL, C5, B5, C6); Tray 2, optional 1x550-sheet feeders: A4, A5, A6, RA4, B5, B6, 10 x 15 cm, Oficio, 16k, Dpostcard (JIS)   | Imperial                         | Tray 1: Letter, Legal, Executive, Statement, Oficio, $3\times5$ in, $4\times6$ in, $5\times7$ in, $5\times8$ in, envelopes (No. 9, No. 10, Monarch); Tray 2, optional 1 $\times550$ -sheet feeders: Letter, Legal, Executive, Statement, Oficio, $4\times6$ in, $5\times7$ in, $5\times8$ in |  |  |  |
| Media sizes custom                       | Metric   | Tray 1: 64 x 127 to 216 x<br>1200 mm; Tray 2, optional 1x550-sheet<br>feeders: 101 x 148 to 216 x 356 mm  | Imperial                         | Tray 1: 2.52 x 5 to 8.5 x 47.24 in; Tray 2, optional 1x550-sheet feeders: 4 x 5.83 to 8.5 x 14.0 in  |  |  |  |
| Media size, tray 1 (metric)              | A4, A5, A6, RA4, B5, B6, 10 x 1  | 15 cm, Oficio 216 x 340, 16k, Postcard (JIS), DPostco   | ard (JIS), Envelopes (DL, C5, B5 | 5, C6); custom 64 x 127 to 216 x 1200 mm   |  |  |  |
| Media weights supported, by paper path   | Metric   | Tray 1: 60 to 220 g/m² (plain), 120 to 220 g/m² (glossy); Tray 2: 60 to 220 g/m² (plain), 120 to 220 g/m² (glossy); Optional 550-sheet input trays: 60 to 220 g/m² (plain), 120 to 220 g/m² (glossy)  | Imperial                         | Tray 1: 16 to 58 lb (plain), 32 to 58 lb (glossy);<br>Tray 2: 16 to<br>58 lb (plain), 32 to 58 lb (glossy); Optional<br>550-sheet input trays: 16 to 58 lb (plain), 32 to<br>58 lb (glossy)  |  |  |  |
| Media weights supported, tray 1 (metric) | 60 to 220 g/m² (plain), 120 to   | 220 g/m² (glossy)   |                                  |  |  |  |  |
| Media size, ADF                          | Letter; Legal; Oficio; Executiv  | e; Statement; 16K; A4; RA4; A5; A6; B5; B6 (JIS); Pos   | stcard (JIS); DPostcard (JIS); 4 | x 6 in; 5 x 7 in; 5 x 8 in   |  |  |  |
| Media weights supported, ADF             | Metric   | 45 to 199 g/m²  | Imperial                         | 12 to 53 lb  |  |  |  |
| Key media sizes supported                | Metric   | A4  | Imperial                         | Letter; Legal  |  |  |  |
| Control panel                            | 10.1-in touchscreen with cold  | or graphics   |                                  |  |  |  |  |
| System requirements, Macintosh, minimum  | 2 GB available hard drive sp   | ace; Internet connection; or USB port; Internet bro   | owser; For additional OS hardv   | vare requirements, see apple.com   |  |  |  |
| System requirements, minimum             | 2 GB available hard disk spo   | ace; Internet connection; or USB port; Internet brow  | wser; For additional OS hardwo   | are requirements, see <u>microsoft.com</u>   |  |  |  |
| Manufacturer warranty                    |  | One-year Next Business Day Onsite Warranty; Warranty and support options vary by product, country, and local legal requirements. Go to <a href="http://hp.com/support">http://hp.com/support</a> to learn about HP award-winning service and support options in your region.  |                                  |  |  |  |  |
| Weight                                   | Metric   | 39.1 kg   | Imperial                         | 86.0 lb  |  |  |  |
| Package weight                           | Metric   | 42.9 kg   | Imperial                         | 94.4 lb  |  |  |  |

| Processor speed                   | 1.2 GHz   |  |   |   |   |  |
|-----------------------------------|---|--|---|---|---|--|
| Orderable supplies                | W9282MC Yellow M<br>LaserJet Toner Coll-<br>serJet 220V Enhand      | HP W9280MC Black Managed Original LaserJet Imaging Drum (~150,000 pages); HP W9281MC Cyan Managed Original LaserJet Imaging Drum (~150,000 pages); HP W9282MC Yellow Managed Original LaserJet Imaging Drum (~150,000 pages); HP LaserJet Toner Collection Unit 527F9A; HP LaserJet 110V Fuser Kit 527G0A; HP LaserJet 220V Fuser Kit 527G1A; HP LaserJet 110V Enhanced Fuser Kit 527G6A; HP LaserJet 220V Enhanced Fuser Kit 527G7A; HP LaserJet Image Transfer Belt 527G8A; HP LaserJet Image Transfer Belt Kit 527G9A; HP LaserJet MP Tray Roller Kit 527G3A; HP LaserJet Image Transfer Belt Kit 527G4A; HP LaserJet MP Tray Roller Kit 527H3A; HP LaserJet AP Maintenance Kit 6H121A; HP Staple Cartridge Refill (5,000 staples) J8J96A                               |   |   |   |  |
| Printer smart software features   |   | Hardware Integration   |   |   | ogy, HP Auto-On/Auto-Off technology, Easy-access USB,<br>e pages per sheet (2, 4, 6, 9, 16), collation, watermarks, store   |  |
| Power consumption description     | 655 watts (printing/  | copying), 50.1 watts (F  | Ready), 0.9 watts (Sleep), 0.09 watts (Manu   | ial off)                                |   |  |
| Power supply type                 | Built in 110V or 220V   | power supply (not du   | ual voltage, power supply varies by part nu   | mber with option cod                    | e identifier)   |  |
| Power supply required             | Input voltage: 100V   | to 127V nominal (+/-10   | %), 50 - 60 Hz nominal (+/- 3Hz), 12A; Input  | voltage: 220V to 240V                   | nominal, (+/-10%) 50 - 60 Hz nominal (+/- 3 Hz), 6A   |  |
| What's in the box                 | (~5,000 yield each)   |  | alled); Documentation (Hardware Installat   |   | yan, Magenta, and Yellow Original Laser Jet Toner Cartridges<br>t; Tray Lock Kit (Paper-size cassette locks, paper tray interface   |  |
| Replacement cartridges            | W9252MC Yellow M<br>HP W9280MC Black                                | anaged Original Lase<br>Managed Original L   | erJet Toner Cartridge (~18,000 pages); HP '<br>aserJet Imaging Drum (~150,000 pages); H | W9253MC Magenta N<br>IP W9281MC Cyan Ma | anaged Original LaserJet Toner Cartridge (~18,000 pages); HP<br>Managed Original LaserJet Toner Cartridge (~18,000 pages);<br>anaged Original LaserJet Imaging Drum (~150,000 pages); HP<br>Managed Original LaserJet Imaging Drum (~150,000 pages) |  |
| Supplies feature                  | TerraJet Cartridge  |  |   |   |   |  |
| Electromagnetic emission standard |   | 00-3-2:2019, EN 6100   |   |   | x11:2020, CISPR 35:2016 (International) / EN 55035:2017 + -003, Issue 7 Class A. Other EMC approvals as required by   |  |
| Safety approvals and requirements | EN 62479:2010/IEC 0<br>UL62368-1 2nd Ed. 2                          | IEC 609504:2005 + A1:2009 + A2:2013 (International); IEC 623684:2014; EN 623684:2014; EN 608254:2014 + A11:2021/IEC 608254:2014 (Class 1 Laser Product); EN 62479:2010/IEC 62479:2010; Low Voltage Directive 2014/35/EU with CE Mark (Europe); GS certificate (Germany, Europe); UL/cUL Listed and UC CoC (US/Canada); UL623681 2nd Ed. 201412-01, CSA C22.2 No. 62368-114, 2nd Ed.; Compliance with Laser safety standards 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 56, dated May 8, 2019; Other safety approvals as required by individual countries.   |   |   |   |  |
| Ecolabels                         | CECP; IT ECO Decla  | ration; Blue Angel; SE   | EPA; KOECO  |   |   |  |
| Blue Angel compliance             | Yes, Blue Angel DE-l  | JZ 219-only ensured  | when using Original HP supplies   |   |   |  |
| Sustainable impact specifications | 15% post-consumer   | recycled plastic   |   |   |   |  |
| Network capabilities              | Yes, via HP Jetdirec<br>Links; IPsec (standa                        | Ethernet embedded<br>rd); 802.11b/g/n wirele   | l print server (standard) which supports: 10<br>ss networking (optional)                | DBase-T, 100Base-Tx, 1                  | 000Base-T; 802.3az (EEE) support on Fast Ethernet and Gig   |  |
| Supported network protocols       | FTP Print, Google Cl  | oud Print; Discovery:<br>outer, Statefull via DF   | SLP, Bonjour, Web Services Discovery; IP (  | Config: IPv4 (BootP, D)                 | pport only), Web Services Printing, IPP 2.0, Apple AirPrint™,<br>HCP, AutolP, Manual, TFTP Config, ARP-Ping), IPv6 (Stateless<br>Infig, FTP FW Download, Syslog; Security: SNMPv3, SSL Cert   |  |
| Mobile printing capability        | Apple AirPrint™; NF0  | touch-to-print (optic  | onal)   |   |   |  |
| Copier reduce/enlarge             | 25 to 400%  |  |   |   |   |  |
| Max. number of copies             | Up to 9,999 copies  |  |   |   |   |  |
| Copy resolution                   | Black text  |  | Up to 600 x 600 dpi   |   |   |  |
|                                   | Color, text, and grap   | hics   | Up to 600 x 600 dpi   |   |   |  |
| Copy speed                        | Black   | A4   | Up to 43 cpm  |   |   |  |
|                                   |   | Letter   | Up to 45 cpm  |   |   |  |
|                                   | Color   | A4   | Up to 43 cpm  |   |   |  |
|                                   |   | Letter   | Up to 45 cpm  |   |   |  |
| Digital sending standard features | SMTP over SSL; aut<br>text/picture (text, mi<br>page suppression; o | Scan to Email; Scan to Network Folder; Scan to USB Drive; Scan to SharePoint; Scan to FTP; Scan to LAN Fax; Scan to Internet Fax; local address book; SMTP over SSL; automatically detect color/monochrome; high compression PDF; image adjustments (darkness, contrast, background clean-up, sharpness); optimize text/picture (text, mixed, printed picture, photograph); content orientation; scan mode (book, 2-sided ID); erase edges; auto page crop; job build; image preview; blank page suppression; automatically straighten; embedded OCR; optimize text/picture (auto); scan to multi-destination; automatic tone; auto orientation; multi-feed detection; document editing; auto paper color removal; job separation (blank page, barcode); watermark; stamps |   |   |   |  |
| Package dimensions                | Metric  | 760 x 790 x 1029 mr  | n   | Imperial                                | 29.9 x 31.1 x 40.5 in   |  |
| Max. dimensions                   | Imperial  | 34.8 x 32.5 x 40.1 in  |   | Metric                                  | 885 x 826 x 1019 mm   |  |

| Product dimensions                             | Metric  | 500 x 476 x 774 mm   |                        |                        | Imperial                | 19.7 x 18.7 x 30.5 mm | n                                    |
|--|---|--|------------------------|------------------------|-------------------------|-----------------------|--------------------------------------|
| Display description                            |   | 0.1-in Color Graphic Display (CGD) with touchscreen; rotating (adjustable angle)   |                        |                        |                         |                       |                                      |
|  |   |  | ouchscreen, rotating   | (dajustable drigle)    |                         |                       |                                      |
| Acoustic power emissions                       | Active, printing  | 6.3 B(A)   |                        |                        |                         |                       |                                      |
| Acoustic pressure emissions bystander          | Ready   | 22 dB(A)   |                        |                        |                         |                       |                                      |
| Operating humidity range                       | 10 to 80% RH  |  |                        |                        |                         |                       |                                      |
| Operating humidity range (recommended)         | 30 to 70% RH  |  | T                      |                        | T                       |                       | T                                    |
| Operating temperature range                    | Celsius: 10 to 32.5°0   |  | Recommended cel        | sius: 15 to 27°C       | Fahrenheit: 50 to 9°    |                       | Recommended fahrenheit: 59 to 80.6°F |
| Storage temperature range                      | Celsius: -20 to 40°C  |  |                        |                        | Fahrenheit: -4 to 10    | 4°F                   |                                      |
| Fax  | Optional  |  | T                      |                        |                         |                       |                                      |
| Fax speed                                      | Letter: 3 sec per pa  | ge   |                        | th optional analog fax | accessory)              |                       |                                      |
| Memory   | Standard: 6 GB  |  | Maximum: 6 GB          |                        |                         |                       |                                      |
| Print resolution technologies                  |   |  | 00 dpi), Quickview (30 | 0 x 300 dpi)           | T                       |                       |                                      |
| Print speed                                    | A4 Black: Up to 43 p  | pm   | Letter Black: Up to    | 45 ppm                 | A4 Color: Up to 43 p    | opm                   | Letter Color: Up to 45 ppm           |
|  | Up to 45 ppm (black   | ) and 45 ppm (color)   | 1                      |                        | T                       |                       |                                      |
| First page out                                 | Black   |  | A4, ready              |                        | As fast as 6.9 sec      |                       |                                      |
|  |   |  | Letter, ready          |                        | As fast as 6.8 sec      |                       |                                      |
|  | Color   |  | A4, ready              |                        | As fast as 7.7 sec      |                       |                                      |
|  |   |  | Letter, ready          |                        | As fast as 7.6 sec      |                       |                                      |
| Duty cycle                                     | A4  |  | Monthly                |                        | Up to 120,000 page      |                       |                                      |
|  |   | Letter Monthly Up to 120,000 pages   |                        |                        |                         |                       |                                      |
| Recommended monthly page volume                | Up to 15,000 pages  |  |                        |                        |                         |                       |                                      |
| Fonts and typefaces                            | 105 internal TrueType fonts scalable in HP PCL, 92 internal scalable fonts in HP postscript level 3 emulation (Euro symbol built-in); 1 internal Unicode fonts (Andale Mond World Type); 2 Internal Windows Vista 8 fonts (Calibri, Cambria); additional font solutions available via third-party flash memory cards; HP LaserJet Fonts and IPDS Emulation available at <a href="https://www.hp.com/go/laserjetfonts">https://www.hp.com/go/laserjetfonts</a> |  |                        |                        |                         |                       |                                      |
| Hard disk                                      | Standard, minimum   | 500 GB HDD   |                        |                        |                         |                       |                                      |
| Print languages, standard                      | HP PCL 6; HP PCL 5  | c; HP postscript level   | 3 emulation, native Pl | DF printing (v 1.7)    |                         |                       |                                      |
| Printer management                             | HP Web Jetadmin; F<br>Services (SDS)  | HP Security Manager,   | HP Secure Insights, E  | Embedded Web Serve     | r, HP Command Cent      | er, HP Secure Fleet M | lanager Advanced. HP Smart Device    |
| Top key features                               | Flow; Touchscreen;  | Stapling; TerraJet Ca  | rtridge                |                        |                         |                       |                                      |
| Target number of users and print volume        | For teams up to 15 t  | sers; Prints up to 15,0  | 000 pages/month        |                        |                         |                       |                                      |
| AIO Functions                                  | Print, copy, scan, fax  | (optional)   | _                      |                        |                         |                       |                                      |
| Duplex print options                           | Automatic   |  |                        |                        |                         |                       |                                      |
| Print technology                               | Laser   |  |                        |                        |                         |                       |                                      |
| Paper trays, standard                          | 2   |  |                        |                        |                         |                       |                                      |
| Input capacity                                 | Standard: Up to 650   | sheets   |                        |                        |                         |                       |                                      |
| Output capacity                                | Standard: Up to 750   | sheets   |                        |                        |                         |                       |                                      |
| Media type and capacity tray 1                 | Paper: 100 sheets a   | f 75 g/m² media  |                        |                        | Envelopes: 10           |                       |                                      |
| Paper handling standard                        | Input: 550-sheet inp  | out tray, 100-sheet mu   | ılti-purpose tray      |                        | Output: 250-sheet       | output tray, 500-shee | et output stapler stacker            |
| Input capacity, max. envelopes                 | Up to 10 envelopes  |  |                        |                        |                         |                       |                                      |
| Product short name                             | X58045  |  |                        |                        |                         |                       |                                      |
| Typical Electricity Consumption (TEC) number   | 0.552 kWh/week (EN  | NERGY STAR 3.0); 0.55  | 51 kWh/week (Blue Ang  | gel)                   |                         |                       |                                      |
| Number of simultaneous users (local + network) | 5-20 users  |  |                        |                        |                         |                       |                                      |
| Scan resolution                                | Hardware: Up to 600 x 600 dpi Optical: Up to 600 x 600 dpi Enhanced: Up to 600 dpi  |  |                        |                        | Enhanced: Up to 600 dpi |                       |                                      |
| Scan speed (normal, A4)                        | Up to 56 ppm/112 ip   | m (b&w), up to 56 ppm  | n/112 ipm (color)      |                        |                         |                       |                                      |
| Automatic Document Feeder (ADF) capacity       | Standard, 100 sheets  |  |                        |                        |                         |                       |                                      |
| Color scanning                                 | Yes   |  |                        |                        |                         |                       |                                      |
| Grayscale levels                               | 256   |  |                        |                        |                         |                       |                                      |
|  |   | ront panel applications: Copy; E-Mail; Fax; Save to Network Folder; Save to USB; Save to Device Memory; Open Extensibility Platform (OXP) applications |                        |                        |                         |                       |                                      |


| Color scanning                           | Yes  |   |                                  |   |  |  |  |
|--|--|---|----------------------------------|---|--|--|--|
| Grayscale levels                         | 256  | 256   |                                  |   |  |  |  |
| Scan input modes                         | Front panel applications: Co   | Front panel applications: Copy, E-mail; Fax; Save to Network Folder; Save to USB; Save to Device Memory, Open Extensibility Platform (OXP) applications   |                                  |   |  |  |  |
| Scan size maximum                        | ADF, metric  | 216 x 864 mm  | ADF, imperial                    | 8.5 x 34.0 in   |  |  |  |
|  | Flatbed, metric  | 216 x 356 mm  | Flatbed, imperial                | 8.5 x 14.0 in   |  |  |  |
| Scan size minimum                        | ADF, metric  | 68 x 127 mm   | ADF, imperial                    | 2.7 x 5.0 in  |  |  |  |
| Bit depth                                | 24-bit   |   | l .                              |   |  |  |  |
| TWAIN Version                            | Version 2.4  |   |                                  |   |  |  |  |
| Security management                      | (e.g. badge readers); Networ<br>EAP-TLS); SNMPv3; HTTPS; (<br>libraries from Microsoft); Se<br>Pocket for security solution<br>Boot (BIOS Integrity Checkin  | Identity management: Kerberos authentication; LDAP authentication; 1,000-user pin codes; Optional HP and 3 <sup>rd</sup> party advanced authentication solutions (e.g. badge readers); Network: IPsec/firewall with certificate; Pre-shared key; Supports WJA-10 IPsec configuration Plug-in; 802.1X authentication (EAP-PEAP; EAP-TLS); SNMPv3; HTTPS; Certificates; Access control list; Data: Storage encryption; Encrypted PDF & Email (uses FIPS 140 validated cryptographic libraries from Microsoft); Secure Erase; SSL/TLS (HTTPS); Encrypted credentials; Device: Security lock slot; USB port disablement; Hardware Integration Pocket for security solutions; Intrusion Detection with Red Balloon Security technology (constant in-device monitoring for attacks); HP Sure Start Secure Boot (BIOS Integrity Checking with self-healing capability); Whitelisting (loads only known good code DLLs, EXEs, etc.); Embedded Trusted Platform Module (TPM); HP Connection Inspector; Security management: Compatible with Device Security Syslog Messages processed and accessible in Arcsight and |                                  |   |  |  |  |
| Mac compatible                           | Yes  |   |                                  |   |  |  |  |
| Software included                        | No software solutions are in   | ncluded iin the box, only on http://hp.com http://123   | .hp.com                          |   |  |  |  |
| Media types                              | Paper (plain, light, intermediate, light bond, bond, recycled, mid-weight, heavy, mid-weight glossy, heavy glossy, extra heavy, extra heavy glossy, cardstock, card glossy), color transparency, labels, letterhead, envelope, pre-printed, pre-punched, colored, rough, opaque film, user-defined |   |                                  |   |  |  |  |
| Standard media sizes supported           | Metric   | Tray 1: A4, A5, A6, RA4, B5, B6, 16k, 10 x 15 cm, Oficio, postcards (JIS single and double) envelopes (DL, C5, B5, C6); Tray 2, optional 1x550-sheet feeders: A4, A5, A6, RA4, B5, B6, 10 x 15 cm, Oficio, 16k, Dpostcard (JIS)   | Imperial                         | Tray 1: Letter, Legal, Executive, Statement, Oficio, $3 \times 5$ in, $4 \times 6$ in, $5 \times 7$ in, $5 \times 8$ in, envelopes (No. 9, No. 10, Monarch); Tray 2, optional 1x550-sheet feeders: Letter, Legal, Executive, Statement, Oficio, $4 \times 6$ in, $5 \times 7$ in, $5 \times 8$ in |  |  |  |
| Media sizes custom                       | Metric   | Tray 1: 64 x 127 to 216 x<br>1200 mm; Tray 2, optional 1x550-sheet<br>feeders: 101 x 148 to 216 x 356 mm  | Imperial                         | Tray 1: 2.52 x 5 to 8.5 x 47.24 in; Tray 2, optional 1x550-sheet feeders: 4 x 5.83 to 8.5 x 14.0 in   |  |  |  |
| Media size, tray 1 (metric)              | A4, A5, A6, RA4, B5, B6, 10 x  | 15 cm, Oficio 216 x 340, 16k, Postcard (JIS), DPostca   | ard (JIS), Envelopes (DL, C5, B5 | i, C6); custom 64 x 127 to 216 x 1200 mm  |  |  |  |
| Media weights supported, by paper path   | Metric   | Tray 1: 60 to 220 g/m² (plain), 120 to 220 g/m² (glossy); Tray 2: 60 to 220 g/m² (plain), 120 to 220 g/m² (glossy); Optional 550-sheet input trays: 60 to 220 g/m² (plain), 120 to 220 g/m² (glossy)  | Imperial                         | Tray 1: 16 to 58 lb (plain), 32 to 58 lb (glossy);<br>Tray 2: 16 to<br>58 lb (plain), 32 to 58 lb (glossy); Optional<br>550-sheet input trays: 16 to 58 lb (plain), 32 to<br>58 lb (glossy)   |  |  |  |
| Media weights supported, tray 1 (metric) | 60 to 220 g/m² (plain), 120 to   | 220 g/m² (glossy)   |                                  |   |  |  |  |
| Media size, ADF                          | Letter; Legal; Oficio; Executiv  | ve; Statement; 16K; A4; RA4; A5; A6; B5; B6 (JIS); Po   | stcard (JIS); DPostcard (JIS); 4 | x 6 in; 5 x 7 in; 5 x 8 in  |  |  |  |
| Media weights supported, ADF             | Metric   | 45 to 199 g/m²  | Imperial                         | 12 to 53 lb   |  |  |  |
| Key media sizes supported                | Metric   | A4  | Imperial                         | Letter; Legal   |  |  |  |
| Control panel                            | 10.1-in touchscreen with cold  | or graphics   |                                  |   |  |  |  |
| System requirements, Macintosh, minimum  | 2 GB available hard drive sp   | ace; Internet connection; or USB port; Internet bro   | owser; For additional OS hardw   | vare requirements, see apple.com  |  |  |  |
| System requirements, minimum             | 2 GB available hard disk spo   | ace; Internet connection; or USB port; Internet brov  | vser; For additional OS hardwo   | are requirements, see microsoft.com   |  |  |  |
| Manufacturer warranty                    | One-year Next Business Day Onsite Warranty; Warranty and support options vary by product, country, and local legal requirements. Go to <a href="http://hp.com/support">http://hp.com/support</a> to learn about HP award-winning service and support options in your region.                       |   |                                  |   |  |  |  |
| Weight                                   | Metric   | 55.9 kg   | Imperial                         | 123 lb  |  |  |  |
| Package weight                           | Metric   | 75.6 kg   | Imperial                         | 166.3 lb  |  |  |  |

#### X58045 accessories

| Accessory Description   | Accessory SKU # |
|---|-----------------|
| HP Accessibility Kit  | 2TD64A          |
| HP Internal USB Expansion Kit   | 4XN67A          |
| HP Jetdirect LAN Accessory  | 8FP31A          |
| HP Foreign Interface Harness  | B5L31A          |
| HP LaserJet Keyboard Overlay Kit for Simplified Chinese & Traditional Chinese | A7W12A          |
| HP LaserJet Keyboard Overlay Kit-Danish/French-Switzerland/German-Switzerland | A7W13A          |
| HP LaserJet Swedish Overlay Keyboard  | A7W14A          |
| HP SmartCard NIPRNet Solution for US Government                               | CC543B          |
| HP SmartCard SIPRNet Solution for US Government                               | F8B30A          |
| HP Removable Hard Drive Enclosure   | 2NR12A          |
| HP Printing Voice Assistant   | 478C2A          |
| HP MFP Analog Fax 702 Accessory   | 1M0Q0A          |
| HP MFP Analog Fax 703 Accessory (BBU option code only)                        | 1M0Q1A          |
| HP LaserJet Workflow Accelerator Card   | 1M0Q5A          |
| HP Color LaserJet Stand   | 6QN54A          |
| HP Color LaserJet Storage Stand   | 6QN55A          |
| HP Color LaserJet 550-sheet Paper Tray  | 6QN57A          |
| HP LaserJet Workflow Keyboard   | 1M0Q2A          |
| HP LaserJet Workflow UK Keyboard  | 616H2A          |
| HP USB Universal Card Reader  | X3D03A          |
| HP HIP2 Keystroke Reader  | Y7C05A          |
| HP Legic Secure USB Reader  | 4QL32A          |
| HP HID Mob Acc Mifare DES Fire KS Reader                                      | 35H11A          |
| HP 500GB CCC FIPS Hard Disk Drive   | 9EQ11A          |
| HP Jetdirect 3100w BLE/NFC/Wireless   | 3JN69A          |
| HP Color LaserJet Constellation Yellow 550 sheet Paper Tray                   | 65A28A          |
| HP Color LaserJet Cosmic Green 550-sheet Paper Tray                           | 65A29A          |
| HP Color LaserJet Aurora Purple 550-sheet Paper Tray                          | 65A30A          |
| HP Color LaserJet Comet Red 550-sheet Paper Tray                              | 65A31A          |
| HP Color LaserJet Lunar Gray 550-sheet Paper Tray                             | 65A32A          |
| HP Color LaserJet Constellation Yellow Storage Stand                          | 65A38A          |
| HP Color LaserJet Cosmic Green Storage Stand                                  | 65A39A          |
| HP Color LaserJet Aurora Purple Storage Stand                                 | 65A40A          |
| HP Color LaserJet Comet Red Storage Stand                                     | 65A41A          |
| HP Color LaserJet Lunar Gray Storage Stand                                    | 65A42A          |
| HP Color LaserJet X580 Yellow Color Panel Kit                                 | 7Z2U4A          |
| HP Color Laser Jet X580 Green Color Panel Kit                                 | 7Z2U5A          |
| HP Color LaserJet X580 Purple Color Panel Kit                                 | 7Z2U6A          |
| HP Color LaserJet X580 Red Color Panel Kit                                    | 7Z2U7A          |
| HP Color LaserJet X580 Gray Color Panel Kit                                   | 7Z2U8A          |

#### Configuration

#### HP Color LaserJet Enterprise X58045 series

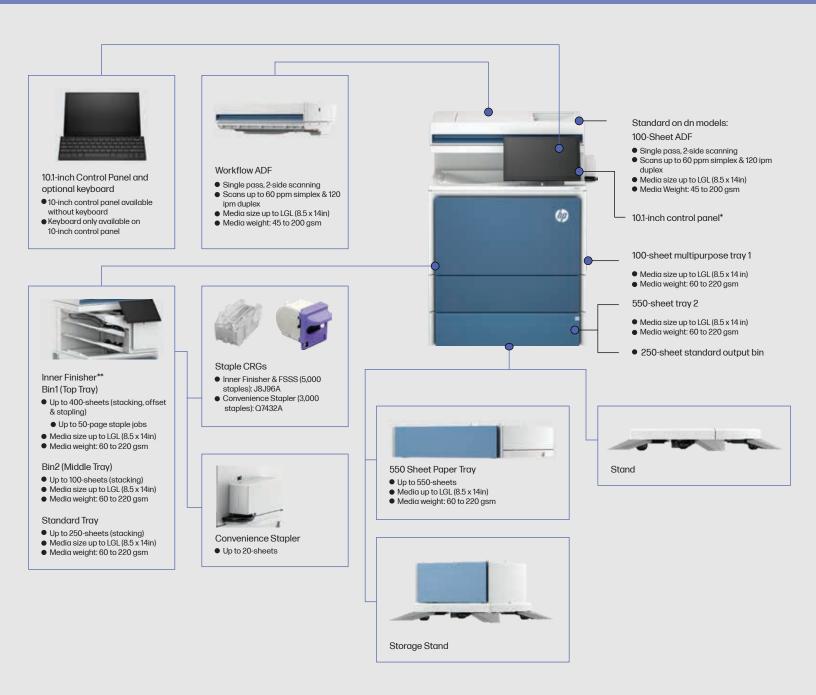

<sup>\*</sup>z bundle

<sup>\*\*</sup>Only available on zs bundle

#### Paper handling accessories

#### Stand and input devices

#### Paper input and stand options



| Product number                     | 6QN57A  | 6QN54A   | 6QN55A                          |
|------------------------------------|---|--|---------------------------------|
| Product description                | HP Color LaserJet 550 sheet paper tray  | HP Color LaserJet stand                                      | HP Color LaserJet storage stand |
| Configuration:<br>X58045dn/X58045z | Compatible (up to 3 or 1 if storage stand or HCl is added) Desktop: Recommend add up to 1 | Compatible  Recommended: Add stand if 3x 550 trays are added | Compatible                      |
| Configuration:<br>X58045zs         | Compatible (up to 2 or 0 if storage stand is added) Desktop: Not Recommend to add         | Compatible  Recommended: Add stand if 2x 550 trays are added | Compatible                      |



© Copyright 2023 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. No HP trademark notice is required, nor is any acknowledgement of another party's trademarks unless we are contractually obligated to do so, e.g., Microsoft or Intel MDF program commitments. See the Trademarks website for the list of such marks.